


from -30°C to $+70^{\circ}\text{C}$

ULTIMATE GENERATION
SINGLE-USE USB DATA LOGGER
FOR TEMPERATURE MONITORING




PHARMACEUTICAL

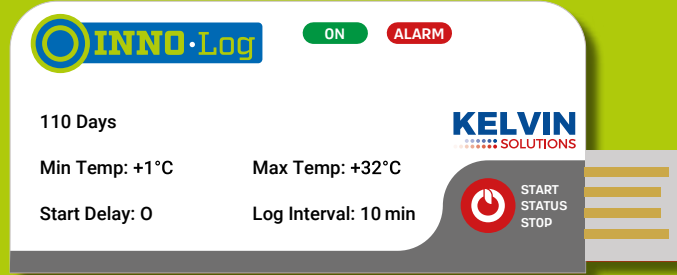

FRESH








FROZEN




TECHNICAL

PLUS & FEATURES

<p>2 Years Shelf Life</p>	<p>Automatic PDF & CSV Report on board</p>	<p>Up to 180 days recording</p>	<p>Comes with a 6 points Certificate of Validation</p>	<p>Secure and easy download of encrypted data files</p>	<p>Up to 5 alarm limits</p>
<p>Built-in USB Connector</p>  <p>Directly connect to computer, no cable required</p>	<p>IP67 Protection class</p>  <p>Food-grade and water-proof packaging</p>	<p>Automatic PDF generation</p>  <p>No software required</p>	<p>Qualified for air transport use</p>  <p>Complies to RTCA/DO- 160G Environmental Conditions, qualified for air transport under active status</p>	<p>Swiss quality</p>  <p>A quality product designed in Switzerland</p>	



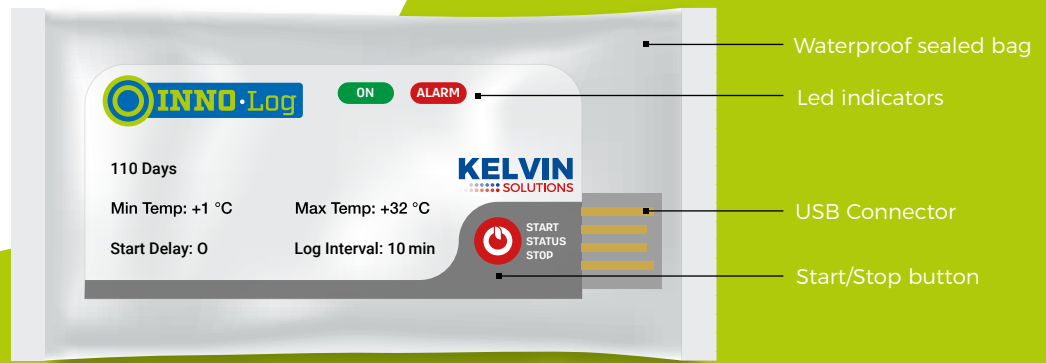

- Waterproof sealed bag
- Led indicators
- USB Connector
- Start/Stop button

TECHNICAL SPECIFICATIONS



DEVICE TYPE	Single use electronic data logger
SENSOR TYPE	Internal digital sensor with self calibrating function
TEMPERATURE UNIT	°C or °F
TEMPERATURE RANGE	30°C to +70°C
ACCURACY	±0.3°C-20°C/+40°C otherwise ±1.0
RESOLUTION	0.1°C/°F
TIME REFERENCE	UTC+00 (UTC = GMT)
STORAGE CAPACITY	16,000 Measurements
RECORDING INTERVAL	10 min standard, other settings on request
RUN TIME / SAMPLING DURATION	Up to 180 days
SHELF LIFE	2 years (CR2450 Battery)
START / STOP MODE	Push start/stop button. Automatic stop when connected to computer
STATUS INDICATOR	Power on and alarm indication led
REPORTING	Automatic generation of PDF and CSV reports on-board. Certificate of Validation as hardcopy in the box and PDF in memory
COMPUTER INTERFACE	USB 2.0
SIZE	95mm x 55mm x 4.5mm
WEIGHT	18g
ALARM CONFIGURATION	Up to 2 alarm thresholds (optional)
DELIVERY CONTENTS	Dispatch documents, Certificate of Validation and sealed pouch
CERTIFICATIONS	EN12830, CE, NIST, FCC, Calibration, NVLAP NIST traceable
VALIDATION RATIONALE	Available on request
PROTECTION CLASS	IP67/NEMA 6

EASY TO MANAGE



1

Click the START button to turn on and enable Innolog™ SU. The data logger is preconfigured and ready to use.



2

Insert enabled Innolog™ SU enabled in the delivery.



3

Remove the device from the delivery and click STOP to disable it. Connect Innolog™ SU directly to the computer USB port.



4

The report (in PDF and CSV format) will download automatically without any software installation.